



Heating & Cooling Systems



# Bryant Energy and Heat Recovery Ventilators



Models E(H)RVXXSHA, E(H)RVXXSVA,  
HRVXXSVB, E(H)RVXXLHB,  
ERVCRNVA, FAVCR



## Benefits of a **BRYANT ERV/HRV**



### **Energy-Saving Operation**

Our heat recovery core conserves your comfort by “recovering” up to 75% of thermal energy from outgoing air and to pre-condition the incoming air. Our energy recovery core also removes excess humidity from recirculated air allowing you to feel more comfortable without making costly temperature adjustments.



### **“Smart” Comfort Control**

Select the airflow and let the system do the rest. Our “smart” control board manages system efficiency and air quality in all weather conditions, all year round. As indoor and outdoor conditions change, it automatically adjusts to deliver the proper amount of fresh air with minimal energy consumption.



### **Quiet, Efficient Airflow**

The ventilator motor offers both performance and durability. It quietly and effectively keeps air circulating through the system while helping to maximize energy efficiency.



### **Enhanced Reliability and Efficiency**

By preventing frost build-up within the system, our damper defrost keeps your ventilator performing at its best. The defrost function engages when outdoor temperatures drop below 23° F.



### **Multiple Wall Control Options**

Bryant offers a wide variety of options for operating your ERV/HRV. Your dealer can help you select the control that best suits your system and personal preferences, including our premium, touch-screen model.



### **Limited Warranty**


To the original owner, our ERVs and HRVs are covered by a 10-year parts limited warranty upon timely registration.\* See warranty certificate at [bryant.com](http://bryant.com) for complete details and restrictions.

\* The limited warranty period is five years if not registered within 90 days of installation. Jurisdictions where warranty benefits cannot be conditioned on registration will receive the registered limited warranty period. See warranty certificate for additional information.



# Outstanding performance **WHATEVER** the season.

Sure, you could open a window or door to let fresh air inside your home. Unfortunately, as heated or cooled air escapes and outdoor humidity enters, your comfort system works a little harder, and costs you money in lost efficiency. Bryant ERVs and HRVs are designed to simultaneously remove stale, polluted indoor air, and refresh your home with clean, outside air. These units maintain higher energy efficiency by recovering thermal energy (heat) from the outgoing air and transferring it to fresh, incoming air without mixing the air streams. This allows the incoming air to more closely match the temperature of air circulating through your home. By minimizing heat loss and helping maintain proper humidity (ERV models), these units can maximize energy efficiency while lowering utility costs.

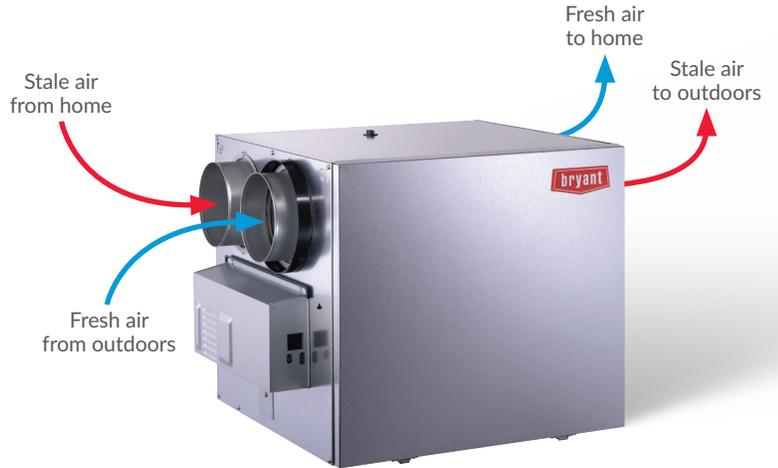

## WHICH ONE IS RIGHT FOR ME?

**ERV:** An ERV, or energy recovery ventilator, is the right choice in the Midwest and southern states, where there is a longer cooling season and removing humidity from incoming air is vital to efficient, comfortable performance.

**HRV:** An HRV, or heat recovery ventilator, is a great choice for comfort and efficiency in colder climates with longer heating seasons, such as Canada or the northern United States.



**ERV/HRV**

ERVXXSHA HRVXXSHA



**ERV/HRV**

ERVXXSVA HRVXXSVA  
HRVXXSVB



**ERV/HRV**

ERVXXLHB HRVXXLHB



**Model FAV**

**Fresh Air Vent:** Our most affordable and compact whole-home ventilation solution, the Bryant fresh air vent provides a controlled solution for fresh, indoor air without the heat exchange or humidity transfer of an ERV or HRV.



**Model ERVCRNVA**

**Add-On ERV:** For installations with space limitations, the add-on ERV offers a more compact solution that fits while still providing the needed ventilation and efficient performance.

# BRYANT COMFORT SOLUTIONS

Features	HRVXXSVA1130 HRVXXSHA1130 SRE 65%	HRVXXSVA1160 HRVXXSHA1160 SRE 65%	HRVXXSVB1160 SRE 75%	HRVXXLHB1230 SRE 75%	ERVXXSVA1150 ERVXXSHA1150 SRE 65%	ERVXXLHB1210 SRE 75%
CFM at 0.2 in. w.g.	35 - 131 CFM	35 - 159 CFM	35 - 159 CFM	35-231 CFM	35 - 150 CFM	35 - 210 CFM
CFM at 0.4 in. w.g.	35 - 119 CFM	35 - 150 CFM	35 - 140 CFM	35-225 CFM	35 - 142 CFM	35 - 206 CFM
SRE 32° F   0° C at 64-66 CFM	68%	68%	75%	78%	71%	81%
SRE -13° F   -25° C at 64-83 CFM	60%	60%	65%	67%	56%	65%
Dimensions (HxWxD)	Side ports: 19-1/8 x 23-1/2 x 16-1/8 in. Top ports: 21-1/2 x 21 x 16-1/8 in.			19.5 x 26.9 x 21 in.	Side ports: 19-1/8 x 23-1/2 x 16-1/8 in. Top ports: 21-1/2 x 21 x 16-1/8 in	19.5 x 26.9 x 21 in.
Ports Configuration	Round, Top or Side, 5 in.	Round, Top or Side, 6 in.	Round, Top or Side, 6 in.		Round, Top or Side, 6 in.	
Filtration Level	Standard MERV 8 Filter or Optional MERV 13 Filter					
Motor Type	PMSM Motors: Permanent Magnet Synchronous Motors					
Defrost	Recirculation	Recirculation	Recirculation	Recirculation	Recirculation	Recirculation
Core	Polypropylene Crossflow Core				Polymerized paper	
Controls	Five Wall Controls Premium, Automatic, Speed Selector, Dehumidistat, Bathroom Override					



For further information, please contact:  
**Bryant.com**

A Carrier Company

©2025 Carrier. All Rights Reserved.  
01-8110-1811-01 08/2025

Manufacturer reserves the right to discontinue or change at any time, specifications or designs without notice or without incurring obligations.  
Third-party trademarks and logos are the property of their respective owners.